




New Security Portal R62_ST

record, your global partner for entrance solutions

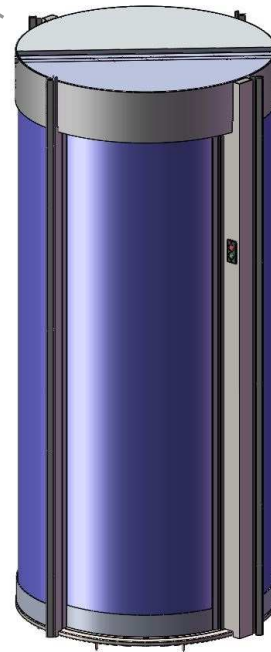

→ **Low ceiling height requested**
The height of the canopy (220mm) allows the installation even if the space under the ceiling is reduced (min. 2450mm).

→ **Reliability**
Based on components from the record product range, such as DFA127, curved doors and the FlipFlow.

→ **Easy to implement**
No need of big structural work:
- Installation on finished floor or pedestal
- Very low sensibility to the external light

→ **3D Camera to detect the Piggybacking**
Thanks to the high security level, two people cannot pass through the portal even if with collusion



→ **Extended connectivity**
Up to 16 dry contact outputs
TCP/IP connection available for integration into a supervisor's software (software not included)



→ **Easy to maintain**
A dedicated operating mode allows to perform the maintenance in good condition of security and safety.

Maintenance flaps are folding down by unlocking a latch.

→ **Compatible with disabled people***
Among the 3 passage widths available (600, 900 and 1100mm), the 2 biggest are compatible with the passage of wheelchair. A special function in the software allows to override the piggybacking detection.

*Check your local regulations

→ **Advanced HMI**
The human machine interface has a clear text. The "Service Display" gives you the possibility to display alarm's review and to adjust timers and parameters

